

MINI UFO LED High Bay Light I200W

LED High Bay Light, low cost, excellent heat dissipation, easy installation for supermarkets, warehouse, factories, docks etc.

Specification

Optical Parameters	
Model	LBT-UFO-200WB
CCT:	3000K / 4000K / 5000K / 6500K
Lumen out(lm) ± 5%:	130LM@4000K
Lumen efficacy:	26000LM/W
LED Type:	SMD3030
CRI:	70Ra / 80Ra
Electrical Parameters	
Rated Power(W) ± 5%	200W
Rated / Actual Input:	AC120V / 60Hz
Driver output Data:	42-54Vdc / 4200mA / 176W
Power Factor / THD / PE:	>90% / <30 / 70%
Driver / Connection:	Driver Inside
Beam Angle:	60° / 90° / 110° / 116° / 120°
Over Load / Short Circuit:	Protection
Life	
Warranty:	5 Years
Lumen Maintenance:	80,000hrs
LM130:	>97.1% lumen maintenance@6000hrs
Others	
IP / IK / Glow-wire:	IP65
Operation Temp:	-30℃~+50℃
Storage Temp:	-40℃~+85℃
Frame Color RAL:	White / Black / Bronze
Packaging Information:	Carton sizes: L380xW380xH150mm
Certification:	   



Anti-glare, UGR<12
Spherical Lens: 60° / 90° / 110°
PC Lens: 116°
Flat Lens: 120°



Different Driver Optional
Round drive, Rectangle drive



Hook / Chain / Pendant
Surface Mounting options

Job Information

Project Name		Location	
Quantity		Contact/Phone	
Notes			
Type		Date	

Description

Competitive Price
Made of quality materials, optimizes performance and long term reliability with very competitive price


Tempered Glass and PC Available
Functionally reliable and steady, PC and tempered glass are optional for your luminaries

Good Heat Dissipation
Using die-casting aluminum, is enduring and can work normally between -30℃ and 50℃


Convenient for Shipping and Stock
With small size and light weight, always saves freight cost for you




PRODUCT SIZE

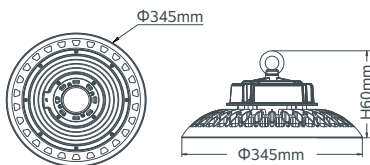


LIGHTING PERFORMANCE

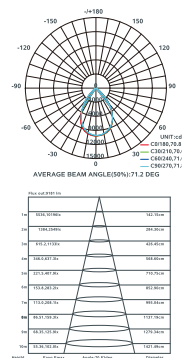

Beam Angle: 60°

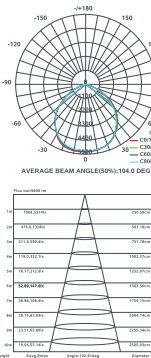

Beam Angle: 90°

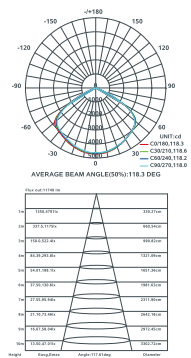

Beam Angle: 110°

LAMP BODY COLOR OPTION



INSTALLATION PROCESS

